

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 15 TOWNSHIP 15 RANGE 4

DATE: 6-17-03

PARTY CHIEF: Wilcoxon



CREW: _____

TYPE OF MARKER: Railroad spike steel peg

METHOD OF ESTABLISHMENT: over stone

County: 1-21-98

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

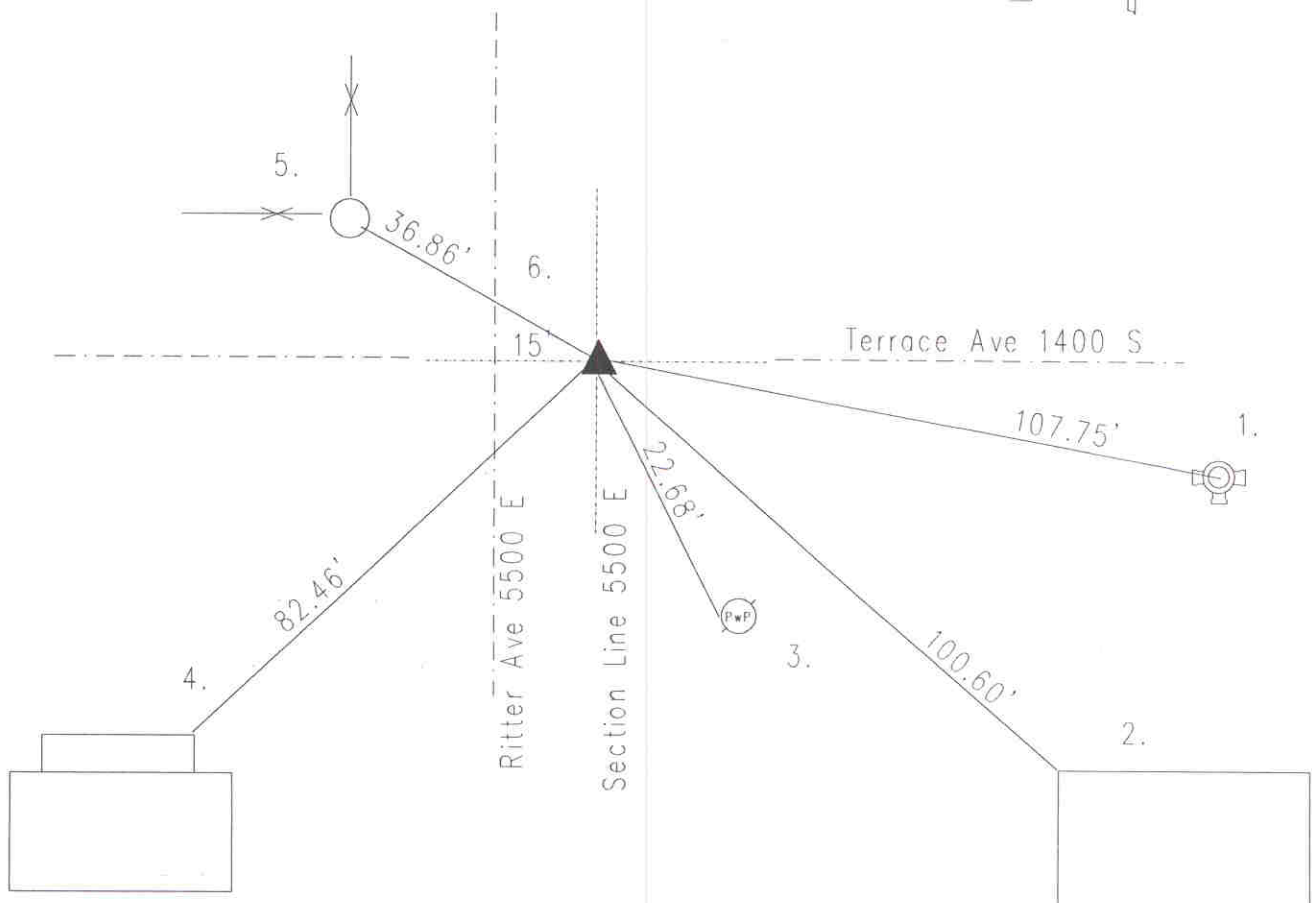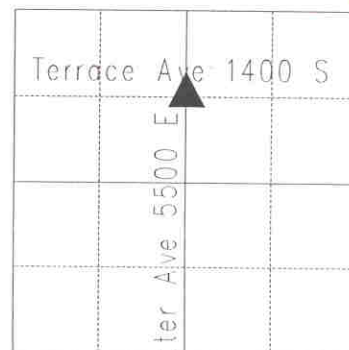

SX541514

| REF. | DISTANCE | DESCRIPTION |
|------|----------|--------------------------------------|
| 1. | 107.75' | Top nut of fire hydrant |
| 2. | 100.60' | NW corner of brick ADDREDD 5505 |
| 3. | 22.68' | PK nail W PwP#142-575 B 15" up |
| 4. | 82.46' | NE corner of porch (one story frame) |
| 5. | 36.86' | Face of steel corner fence post |
| 6. | 15.00' | Due W to C/L of Ritter Avenue |
| | | |
| | | |
| | | |
| | | |